

EAN: 6414150071263

www.oras.com/en/products/oras/product/2814F-104



- Green Building
- Touchless, Battery-operated, Green Building
- Deck mounted
- Chrome
- Standard aerator
- Temperature control handle
- Adjustable hot water stop (included, retrofittable)
- Mixing valve for manual temperature control, Non-return valve(s), Litter filter(s)
- Autofocus infrared sensor, Solenoid valve, Low battery indicator
- Flexible inlet pipes

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller) **0.056 l/s**

Technical properties

Hot water supply **max. +70°C**
 Working pressure **100 - 1000 kPa**

Software settings

Afterflow period **2 s ± 1 s**
 Max. flow period **2 min**

Electronic properties


Battery **Lithium 2CR5 6 V**

Regulations


EMC Directive **C E 2004/108/EC**
 EN standard **EN 15091**
 Noise class **I (ISO 3822)**
 Protection class **IP 55**

Type approvals

UN38.3 **BP 0001-3**

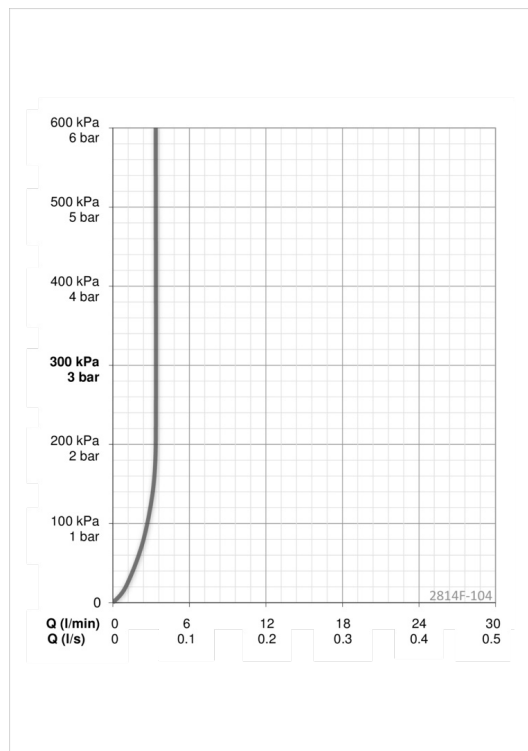

Spare parts

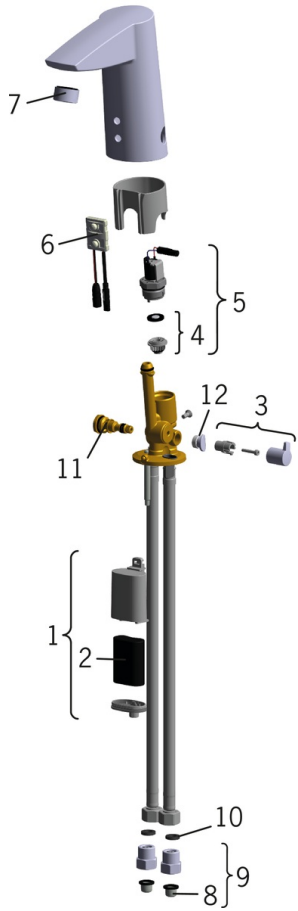

SP2814F-104

	Name	Code
01	Battery casing	199417V
02	Lithium battery, 2CR5 6 V	198330
03	Temperature control handle	600493V
04	Membrane support ring	199205V
05	Solenoid valve	199206V
06	Sensor, 6 V	600659V
07	Aerator, M24x1, -104	601434V
08	Litter filters	199257/2
09	One-way valve with litter screen	198473/2
10	Gasket, 8x14.3x2	600705/10
11	Temperature regulator	199201V
12	Cover plug	601141V