


EAN: 6414150082597

www.oras.com/en/products/oras/product/3060U

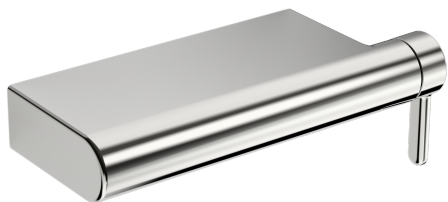

Shower faucet. Eccentric unions with silencer are included. There are also in-built limitation options for water temperature and maximum flow-rate.

- Shower
- Single lever, top operated
- Wall mounted
- Chrome
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- Non-return valve(s), 40 mm ceramic cartridge for flow and temperature control

Technical data

Flow properties




Flow-rate at 300 kPa	0.2 l/s
Pressure loss with flow (0.2 l/s)	200 kPa

Technical properties


Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	G1/2
Installation width	CC150 ± 15 mm
Projection	61 mm
Material	Brass

Regulations

EN standard	EN 1111
Noise class	II (ISO 3822)

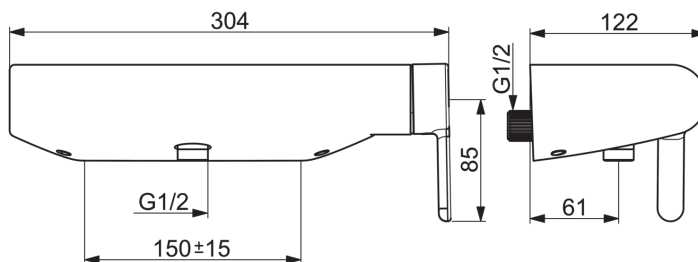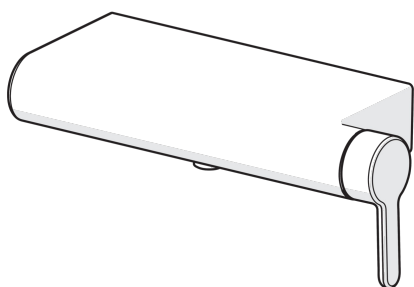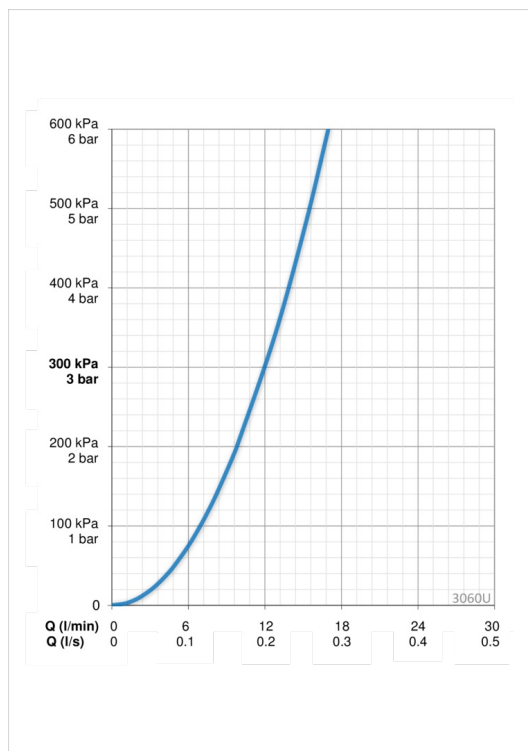

Spare parts

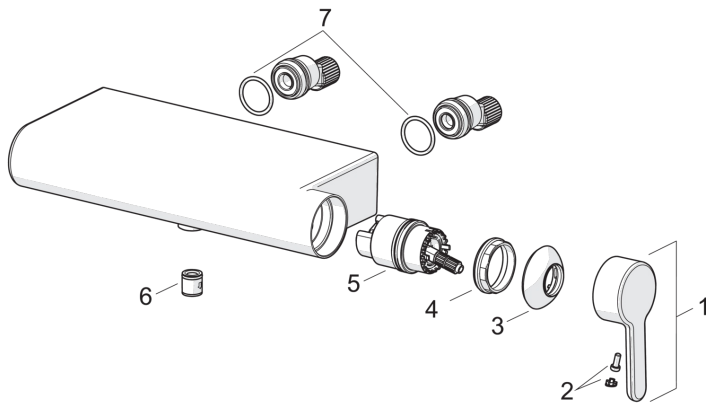

SP3060

	Name	Code
01	Lever	1003074V
02	Symbol plug	1002323V
03	Covering cap	1001740V
04	Tightening nut	158726
05	Cartridge	158890
06	Non-return valve	601989V
07	O-ring, 25.07x2.62	602674V