

EAN: 6414150078057

www.oras.com/dk/products/oras/product/3934F



Kitchen faucet with high spout and dishwasher valve with ceramic valve 90 ° rotation for ON/OFF. Swivel spout and aerator. Spout's swing angle is factory preset at 120° (can be limited to 60°) There are also in-built limitation options for water temperature and maximum flow-rate. F= with flexible pipes

- Køkken
- Et-greb, topbetjent
- Bordmontret
- Forkromet
- Svingtud, Mulighed for begrænsning af svingradius
- Mekanisk afspærringsventil
- Étgreb, Varmt/Koldt symboler
- Mulighed for begrænsning af max. temperatur og vandmængde
- 35 mm keramisk indsats til mængde- og temperaturregulering
- Fleksible tilslutningsslanger
- Installation med 1 gevindstang

Tekniske data

Flow attributter

Vandmængde ved 300 kPa	0.18 l/s
Tryk tab (0.2 l/s)	300 kPa

Tekniske egenskaber


Varmtvandsforsyning	max. +80°C
Arbejdstryk	50 - 1000 kPa
Tilslutningsstørrelse	G3/8
Materiale	brass


Bestemmelser

EN standard	EN 817
Støjklasse	I (ISO 3822)


Typegodkendelse

KIWA SE	1444
---------	-------------

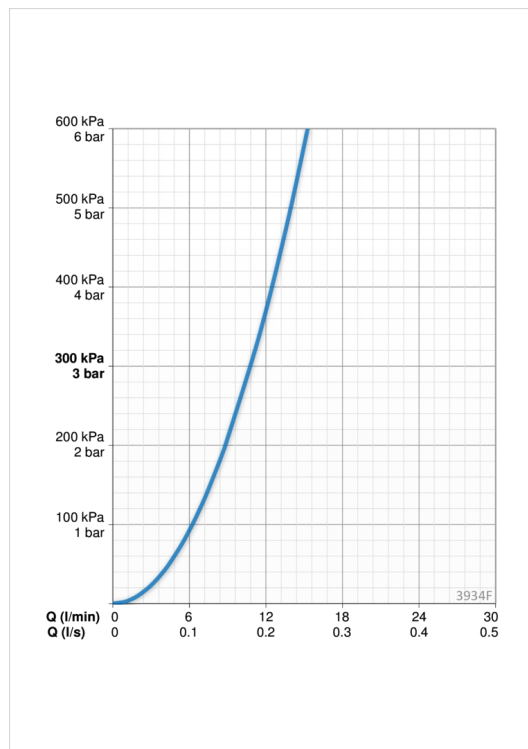

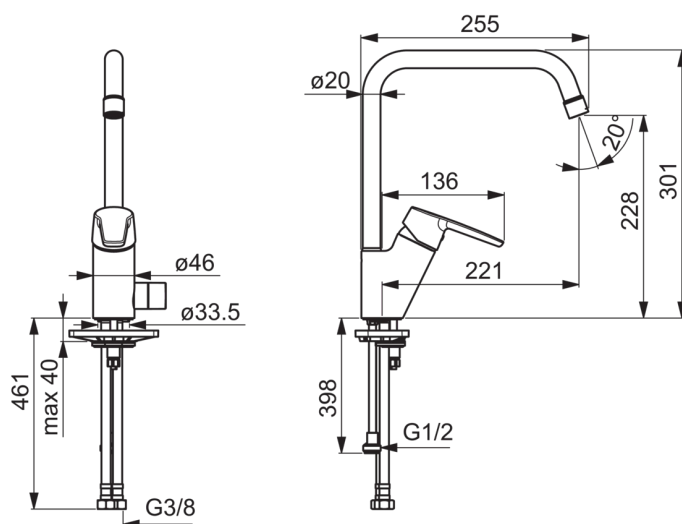

Reservedele

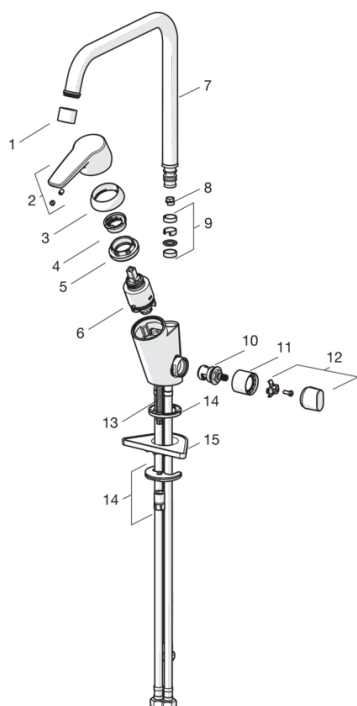

SP3934F

Navn	Kode	VVS
01 Luftblander, STD M22x1 CC A Forkromet	1001070V	745131002
02 Greb Forkromet	1000801V	745131638
03 Dækkappe Forkromet	601967V	745131642
04 Temperaturbegrænser	601973V	745131643
05 Møtrik, M40x1, SW30	601968V	745131644
06 Komplet indmad	601969V	745131645
07 Høj tud, L=255 Forkromet	1000228V	745131632
08 Svigtuds begrænser, 120°	159670/10	745131908
08 Svigtuds begrænser, 60°/0°	159667/10	745131907
09 Pakningssæt til tud	198287V	745131786
10 Topstykke, G1/2	602600V	745131438
11 Roset Forkromet	1000240V	
12 Greb til afspærringsventil for vaske/opvaskemaskine Forkromet	602587V	745131437
13 Gevindstang, M8x1, L=140	601970V	745131610
14 BESPÆNDINGSSÆT	601985V	745131613
15 Plastplade til bESPÆNDING, 100x60mm	158825	745131904