

Bath and shower faucet with eccentric unions, 150cc and cover plates are included. There are also in-built limitation options for water temperature and maximum flow-rate.



- Badekar & dusj
- Ettgreps
- Veggmontert
- Forkrommet
- Fast tut
- CASCADE® - stråle
- Ettgrepshendel, Varmt/kaldt symbol
- Pull omkaster
- Temperatur- og mengdebegrenser
- ø 35 mm kassett
- Eksenterkuplinger, Dekkplate(r)

Teknisk data

Flow attributter

Vannmengde ved 300 kPa	0.33 l/s
Trykktap (0.2 l/s)	165 kPa
Trykktap (0.3 l/s)	300 kPa

Tekniske egenskaper





Varmtvannsforsyning	max. +80°C
Arbeidstrykk	50 - 1000 kPa
Installasjons bredde	cc150 mm

Bestemmelser


EN Standard	EN 817
Støyklasse	II (ISO 3822) Oras lab.

Godkjenninger og Erklæringer

KIWA SE	1446
---------	-------------

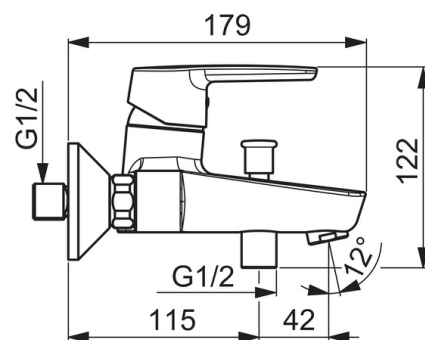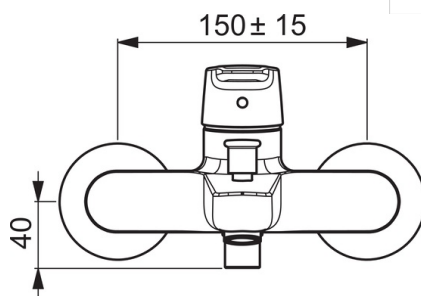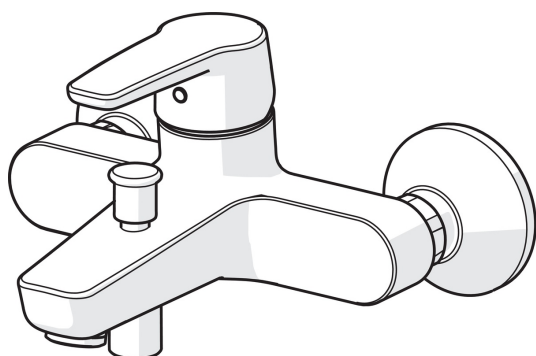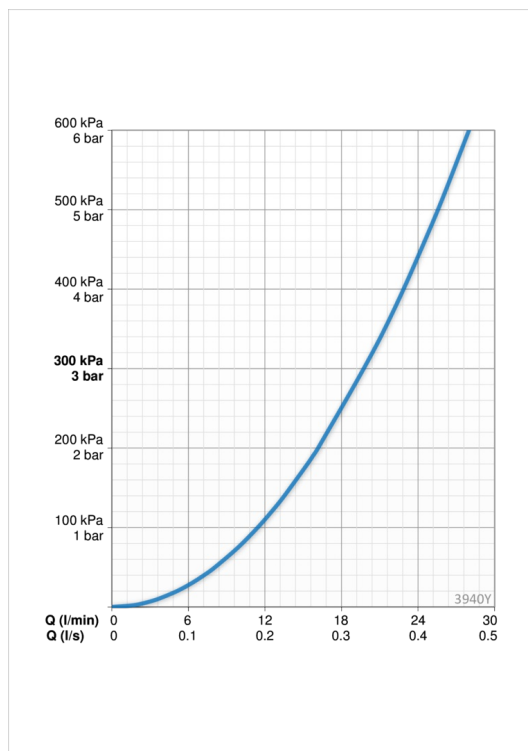

Reserve deler

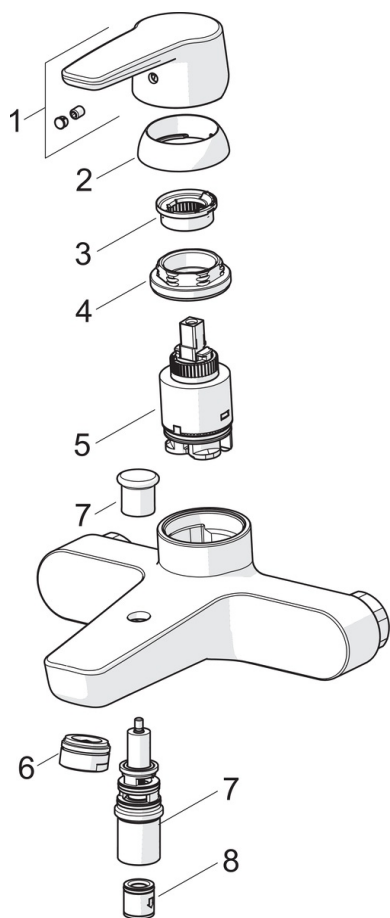

SP3940

	Navn	Kode	NRF
01	Hendel	1000801V	4205238
02	Dekkring	601967V	4205171
03	Sperrehylse	601973V	4205174
04	Festemutter for kassett, M40x1, SW30	601968V	4205172
05	Kassett, 3.5 Classic	601969V	4205173
06	Strålesamler, M24x1 D	602104V	4205186
07	Omkaster	602103V	4205372
08	Tilbakeslagsventil	601989V	4205179