

EAN: 6414150027253

www.oras.com/en/products/oras/product/6130



Touchless basin faucet for pre-mixed water. Plug transformer 230/12 V. Recognition range can be adjusted from the faucet.

- Bathroom
- Touchless, Plug transformer
- Deck mounted
- Chrome
- HONEYCOMB® - improved lime protection
- Litter filter(s)
- Infrared sensor, Power supply

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.11 l/s
Pressure loss with flow (0.1 l/s)	170 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	120 mm
Material	brass

Software settings


Afterflow period	1 s (0-255 s)
Max. flow period	2 min (1 - 255 s)



Electronic properties

Electrical Connection	230 / 12 VAC
-----------------------	---------------------


Regulations

EMC Directive	CE 89/336/EEC
EN standard	EN 15091
Noise class	I (ISO 3822)
Protection class	IP 67 / transformer IP 40

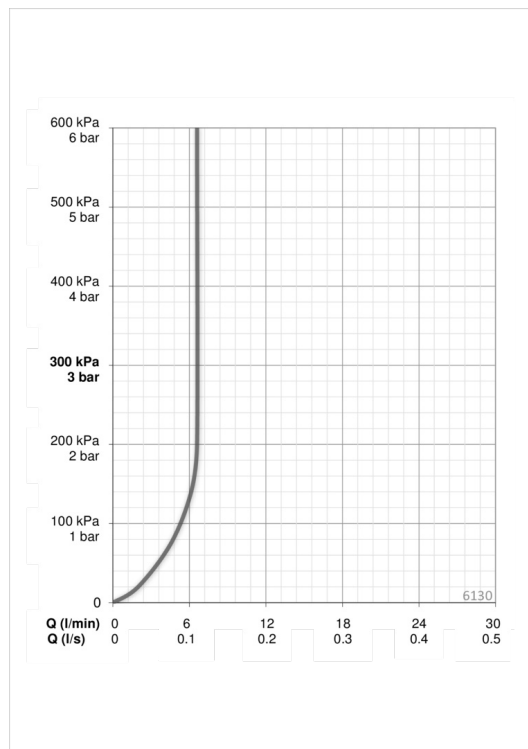

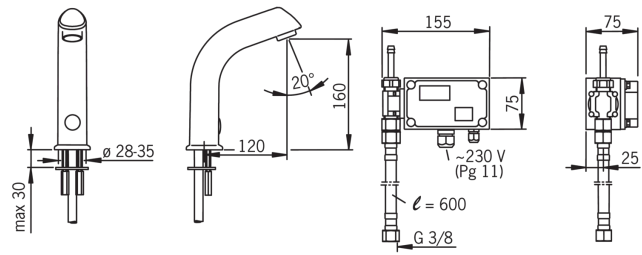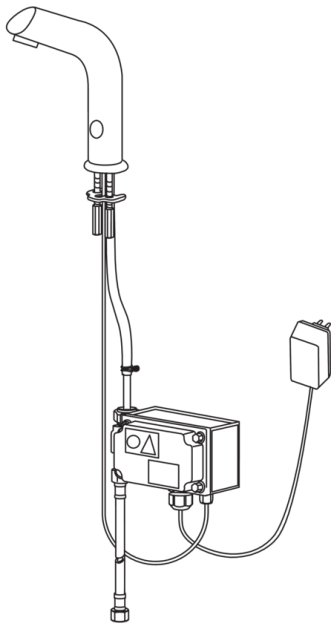

Spare parts

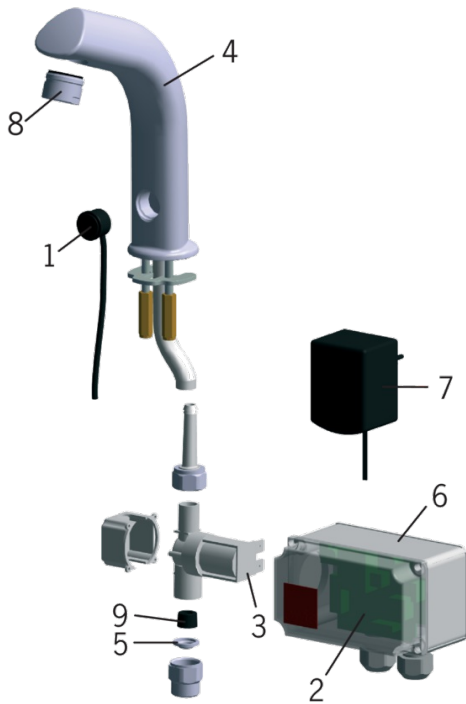

SP6130

	Name	Code
01	Photocell, 6 m	198081/6
01	Photocell	198081
01	Photocell, 3 m	198081/3
01	Photocell, 9 m	198081/9
02	Circuit card, 12 V	198087
03	Solenoid valve, 12 V	198090
04	Spout	198093
05	Litter filters, DN15	198094/2
06	Control box, 12 V	198097
07	Transformer, 230/12 V	198099
08	Aerator, M24 x 1 STD HC A	232211
09	Flow limiter, 6 l/min	198084