

EAN: 6414150071331

www.oras.com/en/products/oras/product/6150F-104



Touchless washbasin faucet with a temperature adjustment handle (as factory default). The faucet can be easily modified for preset temperature or premixed water. Battery-operated 6 V. Thanks to its protection class (IP 67) the faucet is suited to nearly all operating conditions. The faucet is equipped with litter filters, non-return valves and flexible pipes.

No adjustments need to be made at installation because an advanced Autofocus sensor is used. The impulse-controlled solenoid valve gives the battery a long operating life. Flow controller (6 l/min.) enables low water consumption (0.5 l / instance of use).

- Green Building
- Touchless, Battery-operated, Green Building
- Deck mounted
- Chrome
- Fixed spout
- Temperature control handle
- Non-return valve(s), Litter filter(s)
- Autofocus infrared sensor, Impulse-controlled solenoid valve
- Convertible for cold or premixed-water supply

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller) **0.056 l/s**

Technical properties

Hot water supply **max. +70°C**
 Working pressure **100 - 1000 kPa**
 Connection size **G3/8**
 Projection **96 mm**
 Material **brass**

Software settings


Afterflow period **2 s ± 1 s**
 Max. flow period **2 min**


Electronic properties

Battery **Lithium 2CR5 6 V**


Regulations

EMC Directive **CE 89/336/EEC**
 EN standard **EN 15091**
 Noise class **I (ISO 3822)**
 Protection class **IP 55**

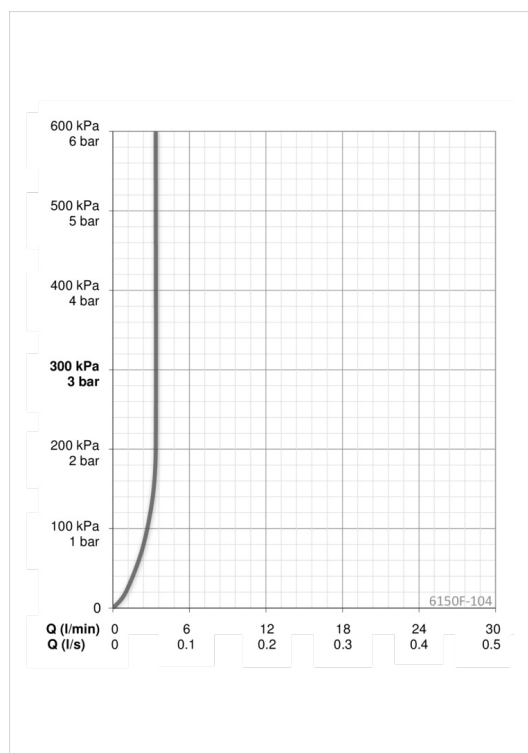

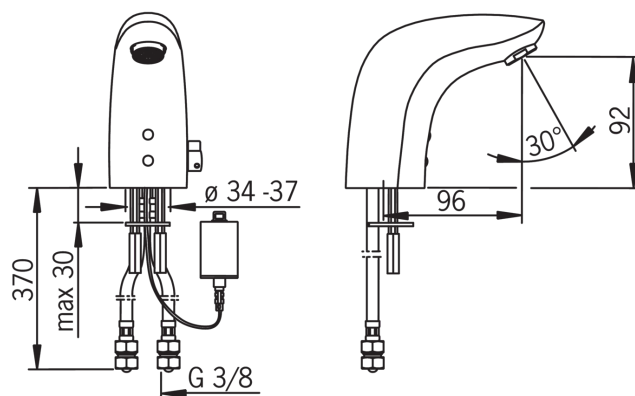

Spare parts

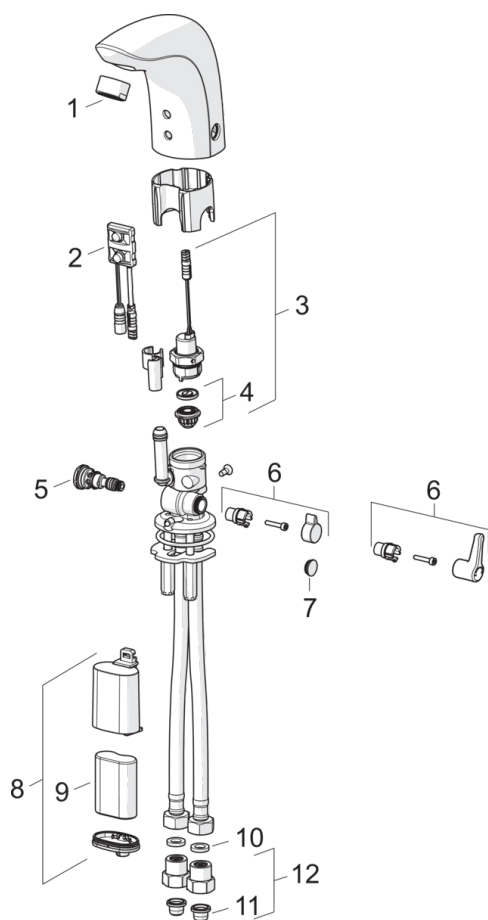

SP6150F

	Name	Code
01	Aerator, M24x1 , -104	601434V
01	Aerator, M24x1 , 6 l/min	199266V
01	Aerator, M24x1 , -102	601255V
01	Aerator, M24x1 , -105	601166V
02	Sensor, 6/9/12 V Bluetooth	1001424V
02	Sensor, 6 V	600659V
02	Sensor, 6 V, -080	601030V
03	Solenoid valve	199206V
04	Membrane support ring	199205V
05	Temperature regulator	199201V
06	Temperature control handle, L=37	1005158V
06	Temperature control handle, L=15	199212V
07	Mixing plug	199208V
08	Battery casing	199417V
09	Lithium battery, 2CR5 6 V	198330
10	Gasket, 8x14.3x2	600705/10
11	Litter filters	199257/2
12	One-way valve with litter screen	198473/2