

EAN: 6414150075155

www.oras.com/en/products/oras/product/6189



Touchless washbasin faucet for cold or pre-mixed water. Battery-operated 3 V. Spout length 225 mm. laminar flow. The faucet is equipped with litter filter, shut-off valve and with G1/2" external connection thread.

- Public & Semi-public, Health & Care
- Battery-operated, Touchless
- Wall mounted
- Chrome
- PCA® for a constant flow rate regardless of pressure fluctuations, HONEYCOMB® with improved lime protection, burglarproof
- Laminar flow
- Cold or pre-tempered water
- Adjustable settings via magnetic key

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	200 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	CC70 mm
Projection	225 mm
Material	brass

Software settings




Automatic flush	off (off/12/24/48/72 h)
Automatic flush period	30 s (10/30/60/120/180/240/300/600 s)
Intelligent afterflow period	2 s ± 1 s (1/2/3/4/8 s)
Max. flow period	120 s (10/30/60/120/300 s)
Recognition range	~15 cm (~10/15/17/20 cm)

Electronic properties


Battery	AA 1.5 V Lithium x 2
---------	-----------------------------

Regulations

EMC Directive	CE 2014/30/EU
EN standard	EN 15091
Protection class	IP 55

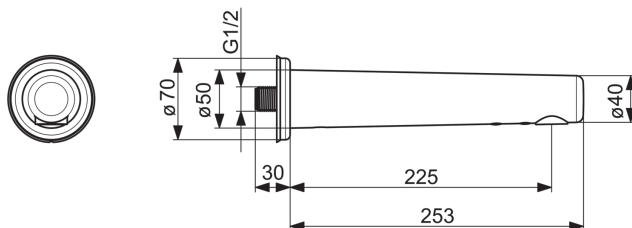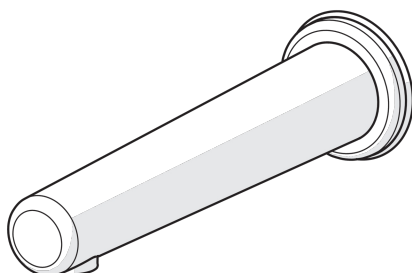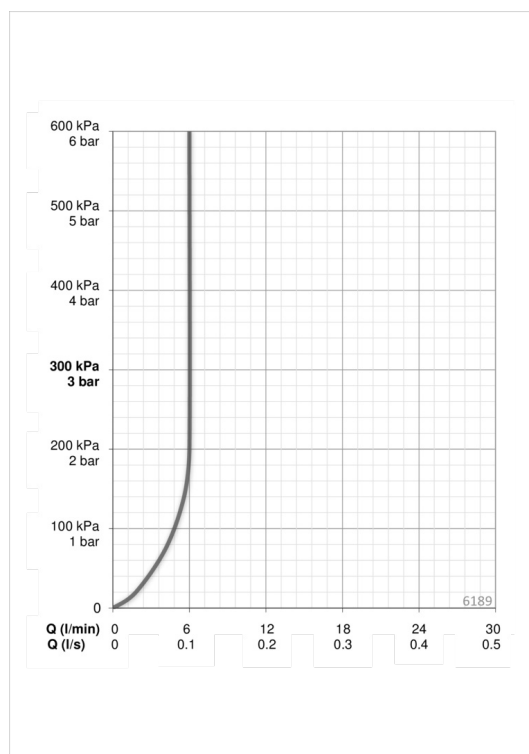

Spare parts

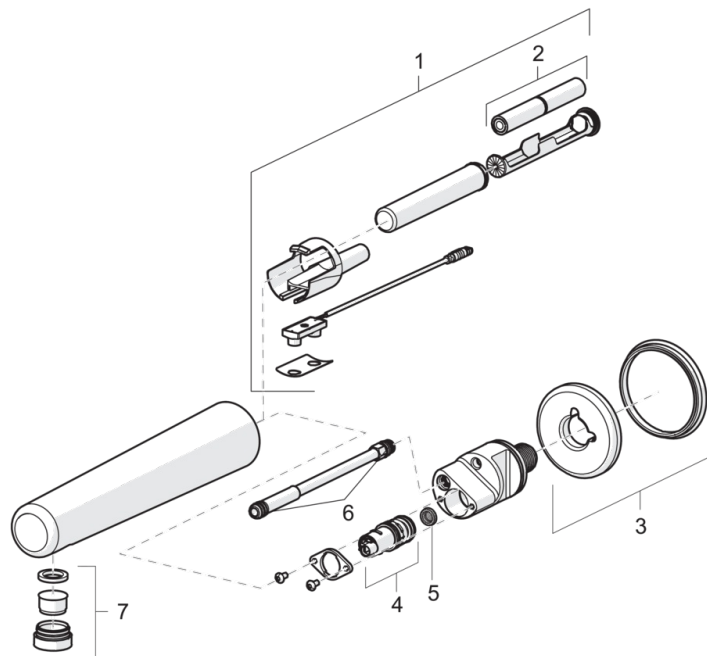

SP6188

	Code
01	602395V
02	600599V
03	602399V
04	602388V
05	602396V
06	158170/10
07	602518V