


EAN: 6414150088247
static.oras.com/7400U

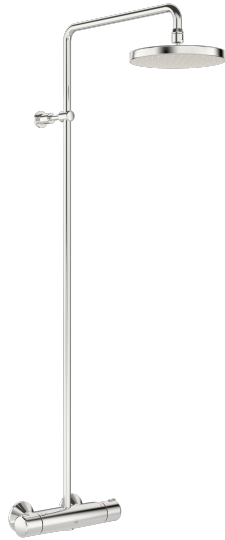

- Shower solutions
- Thermostatic
- Wall mounted
- Chrome
- Temperature control handle, Flow control handle
- Hand shower, Overhead shower, Shower hose (1750 mm), Variable fixing points, Rotatable ball joint connection, Anti limescale technology (easy to clean)
- Rain - Even and strong water stream
- Safety stop against scalding at 38°C, The housing of the fittings conducts minimal heat
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Eccentric coupling(s), External thread, Cover plate(s), Silencer(s)
- Flexible length / can be shortened

Technical data

Flow properties

Flow-rate at 300 kPa	0.27 l/s
Pressure loss with flow (0.2 l/s)	170 kPa

Technical properties


DN-size (nominal dimension)	DN 15
Hot water supply	max. +65°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	CC150± 15 mm
Projection	427 - 452 mm
Material	Brass



Regulations

EN standard	EN 1111, EN 1112, EN 1113
Noise class	I (ISO 3822)


Approvals and Declarations

KIWA SE	1664
---------	-------------

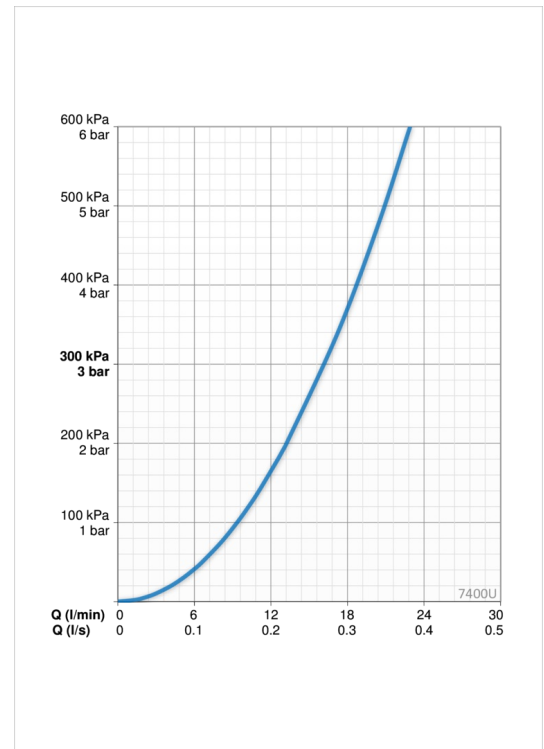

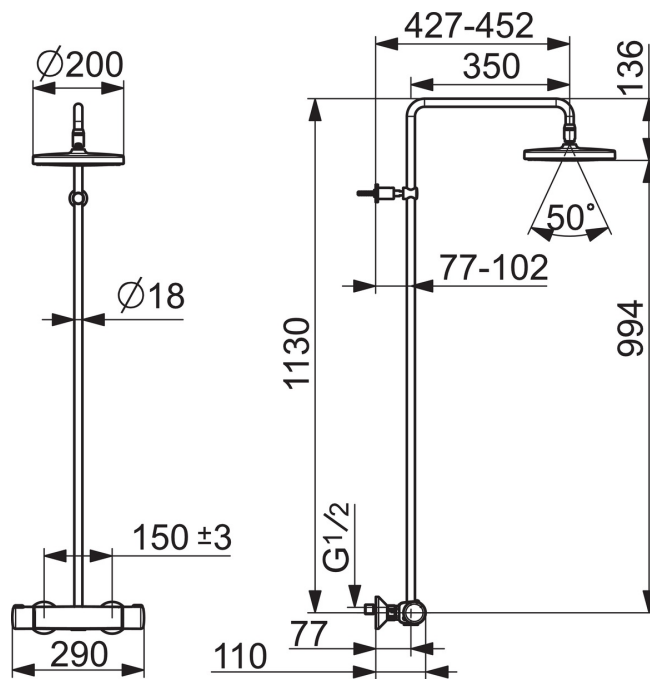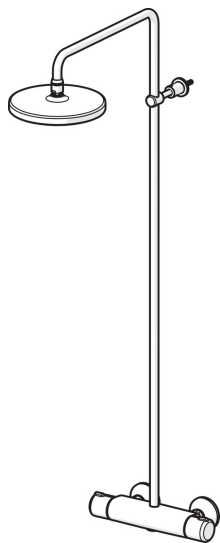

Spare parts

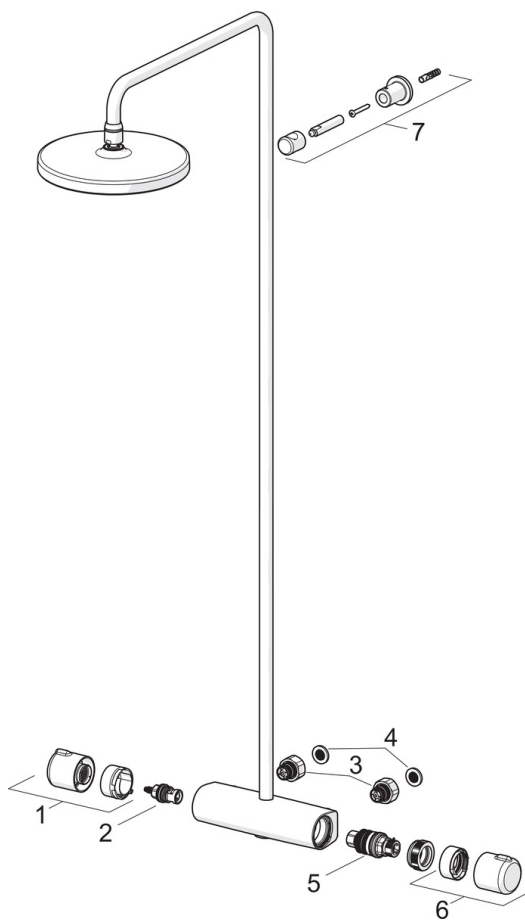

SP7400

Name	Code
01 Flow control handle	602430V
02 Headpart	109898
03 Combiner	602438/2
04 Filter sealing, G3/4, DN20	178375V
05 Thermostatic cartridge	178780V
06 Temperature control handle	602431V
07 Shower pipe holder	1001314V