

EAN: 6414150047114

www.oras.com/en/products/oras/product/5930

Kitchen faucet with swivel pull-out spout with aerator. Spout swing angle 60° (factory default) or 110°.



- Kitchen
- Single lever, top operated
- Deck mounted
- Chrome
- Swivel spout, Pull-out model
- Single operating lever/handle, Hot/Cold symbols
- Non-return valve(s), 40 mm ceramic cartridge for flow and temperature control

Technical data

Flow properties

Flow-rate at 300 kPa	0.21 l/s
Pressure loss with flow (0.2 l/s)	285 kPa

Technical properties




Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	Ø10 mm
Projection	250-750 mm
Material	brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Type approvals

STF certificate	STF VTT-RTH-00098-11
Sintef	Sintef Nr. 0986

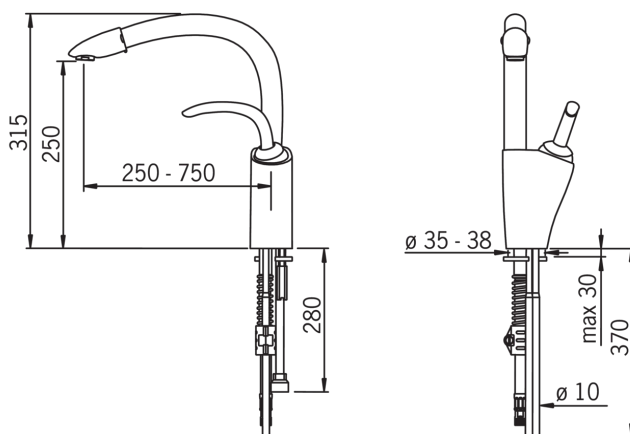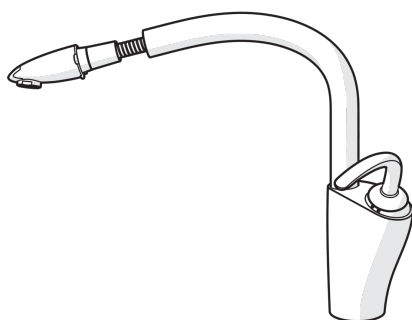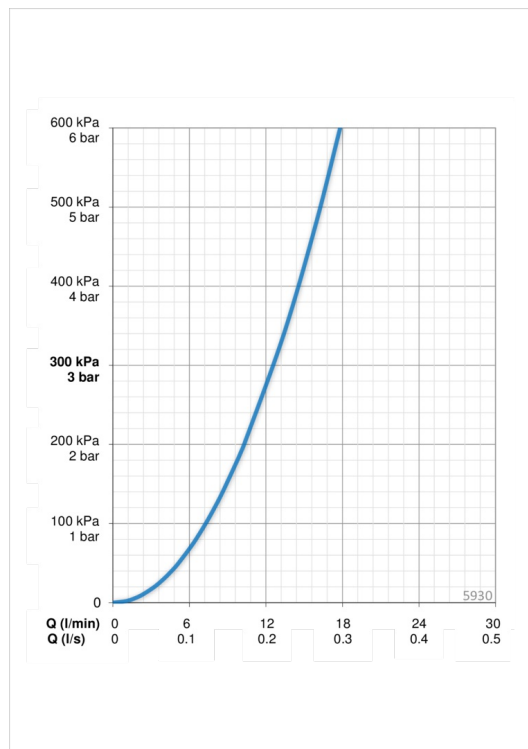

Spare parts

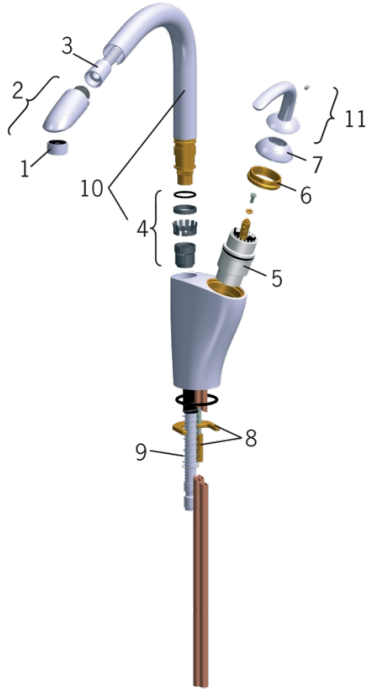

SP5930

	Name	Code
01	Aerator, M24x1 Satin	232210V-60
01	Aerator, M24x1 STD HC B	232210
02	Pull-out spout	159640V
02	Pull-out spout Satin	159640V-60
03	Shower hose, L=1500	600533V
04	Bearing kit for spout	159647V
05	Cartridge	158890
06	Tightening nut	158726
07	Covering cap Satin	859103V-60
07	Covering cap	859103V
08	Fixing plate with a nut	159607V
09	Return spring	159648V
10	Spout Satin	159693V-60
10	Spout	159693V
11	Lever	159639V