

EAN: 6414150070105

www.oras.com/en/products/oras/product/7140U



Thermostatic shower faucet with easy-grip handles. Easy-to-use temperature limiter in the handle. EcoFlow control. The faucet is equipped with litter filters and non-return valves.

- Bathroom, Shower
- Thermostatic
- Wall mounted
- Chrome
- Fixed spout
- Easy-Grip surface, Temperature control handle, Flow control handle
- Turn operated diverter, Integrated into flow control handle
- Eco flow control
- Litter filter(s), Thermostatic cartridge for automatic temperature control

Technical data

Flow properties

Eco-flow at 300 kPa	0.16 l/s
Flow-rate at 300 kPa	0.33 / 0.23 l/s
Pressure loss with flow (0.2 l/s)	230 kPa
Pressure loss with flow (0.3 l/s)	250 kPa

Technical properties





Hot water supply	max. +80°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	CC150± 15 mm
Projection	127 mm
Material	Brass/Plastic

Regulations


EN standard	EN 1111
Noise class	I (ISO 3822)

Type approvals

STF certificate	STF VTT-RTH-00030-15
-----------------	-----------------------------

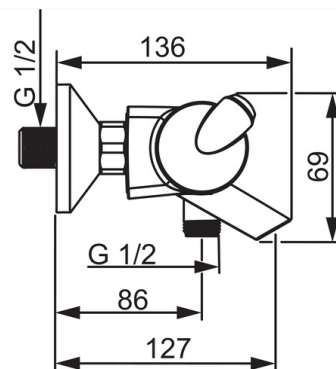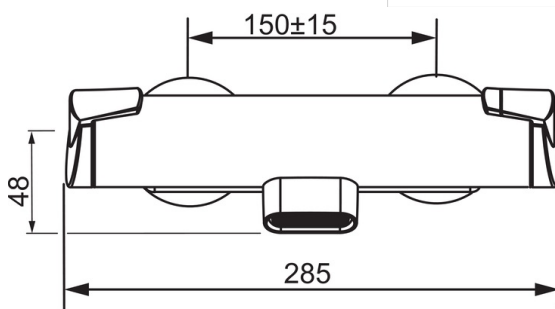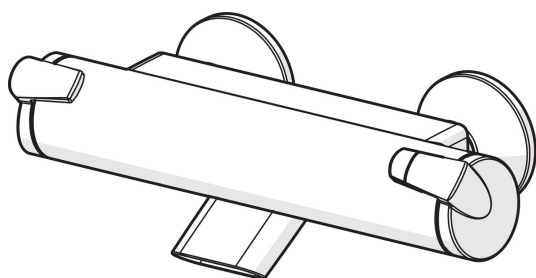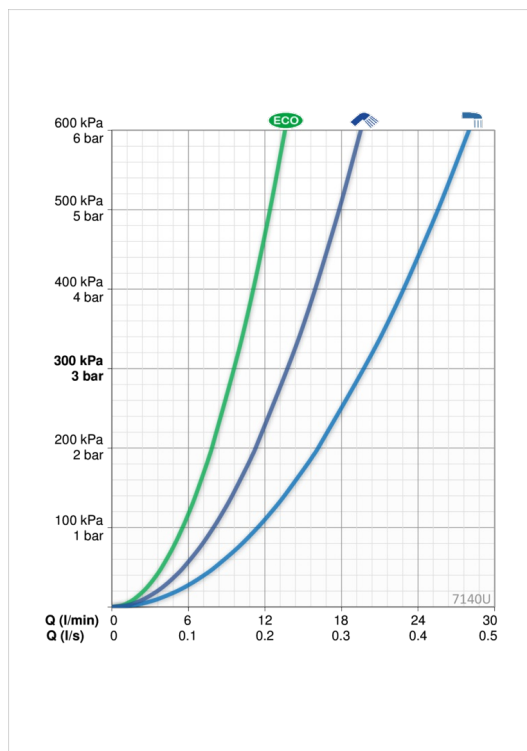

Spare parts

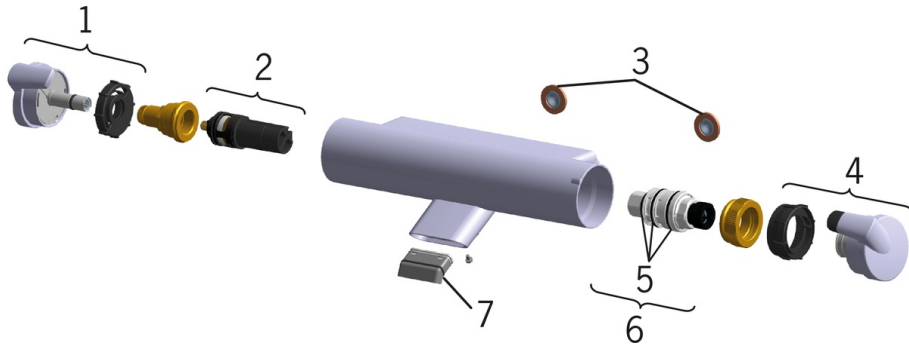

SP7140

	Name	Code
01	Flow control handle	601267V
02	Diverter	601278V
03	Filter sealing, G3/4	178375V
04	Temperature control handle	601273V
05	O-ring kit	178796V
06	Thermostatic cartridge	178780V
07	Nozzle	601637V