

EAN: 6414150077272  
[static.oras.com/7466](http://static.oras.com/7466)



Thermostatic shower faucet. Temperature handle equipped with safety stop at 38°C. Volume handle with EcoFlow control. The faucet includes litter filters and non-return valves.

- Shower solutions
- Thermostatic
- Wall mounted
- Chrome
- Temperature control handle, Flow control handle
- Eco flow control
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)

## Technical data

### Flow properties





|                                   |                 |
|-----------------------------------|-----------------|
| Eco-flow at 300 kPa               | <b>0.18 l/s</b> |
| Flow-rate at 300 kPa              | <b>0.26 l/s</b> |
| Pressure loss with flow (0.2 l/s) | <b>180 kPa</b>  |

### Technical properties


|                    |                       |
|--------------------|-----------------------|
| Hot water supply   | <b>max. +80°C</b>     |
| Working pressure   | <b>100 - 1000 kPa</b> |
| Connection size    | <b>G1/2</b>           |
| Installation width | <b>cc40 mm</b>        |
| Material           | <b>Brass</b>          |

### Regulations

|             |                               |
|-------------|-------------------------------|
| EN standard | <b>EN 1111</b>                |
| Noise class | <b>I (ISO 3822) Oras lab.</b> |

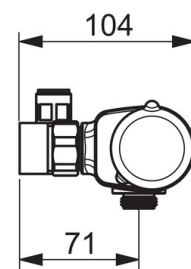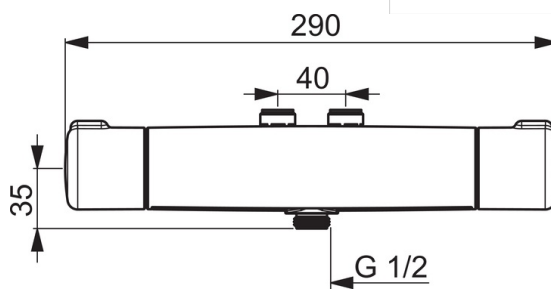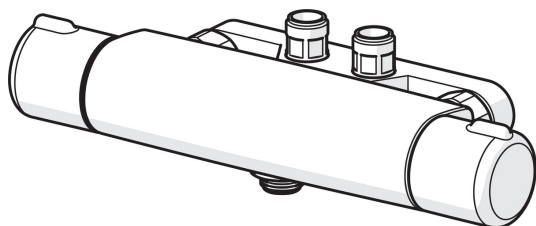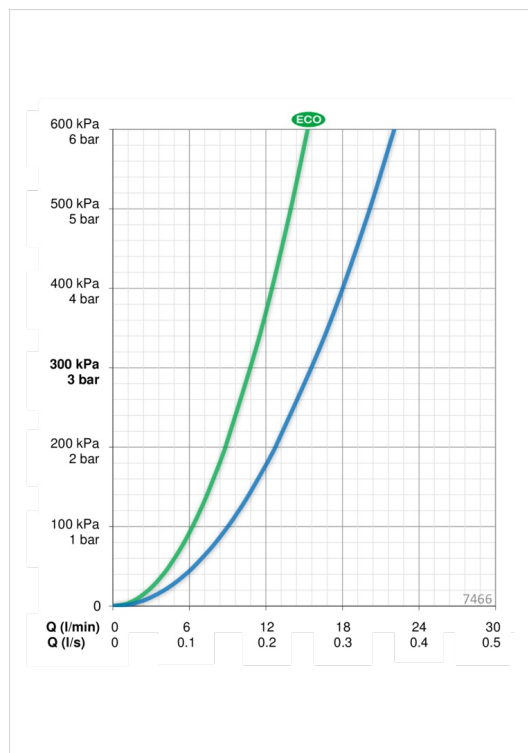

## Spare parts

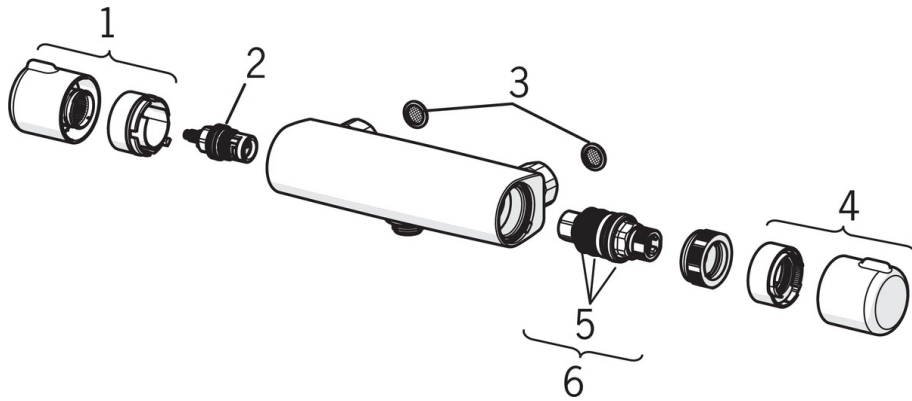

### SP7460

|    | Name                       | Code     |
|----|----------------------------|----------|
| 01 | Flow control handle        | 602430V  |
| 02 | Headpart                   | 109898   |
| 03 | Litter filters, G1/2, DN15 | 198094/2 |
| 03 | Filter sealing, G3/4, DN20 | 178375V  |
| 04 | Temperature control handle | 602431V  |
| 05 | O-ring kit                 | 178796V  |
| 06 | Thermostatic cartridge     | 178780V  |